


2250 Series Driven Conveyor Roller

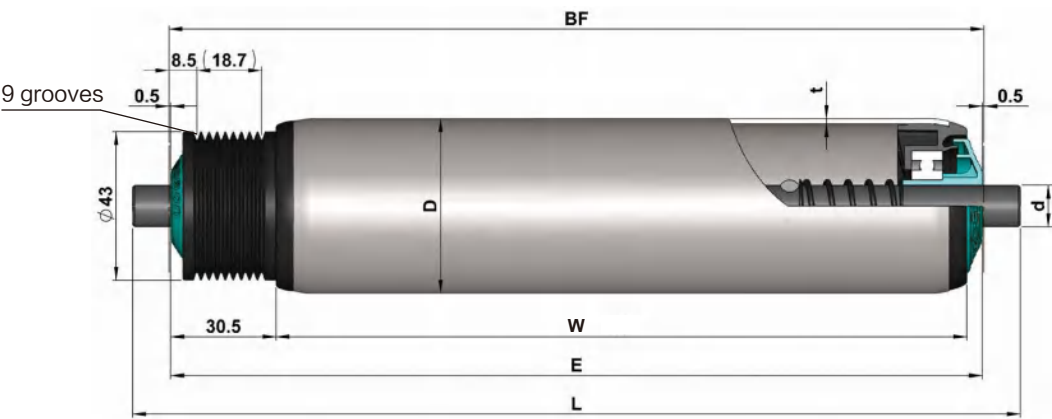

2250 Series Spring Loaded


Tube Dia.(D)	Shaft Dia.(d)			
Φ50	Φ10/12/11hex	BF=W+36	E=W+35	L=W+57

Tube	D*T	Shaft Dia.(d)		
		Φ10	11hex	Φ12
Steel, zinc plated	Φ50x1.5	○	2.250.SHC.BFA	2.250.SHC.ACA
Steel, zinc plated with PVC sleeve (2mm)	Φ50x1.5	○	2.250.SHD.BFA	2.250.SHD.ACA
Stainless steel	Φ50x1.5	○	2.250.NHC.BFA	2.250.NHC.BCA
Aluminium	Φ50x1.5		○	○

○ Available configuration

 Φ50mm rollers can be fitted with PU sleeve (2mm).

 Please choose the steel Poly-Vee roller when you must use 4PJ belt.

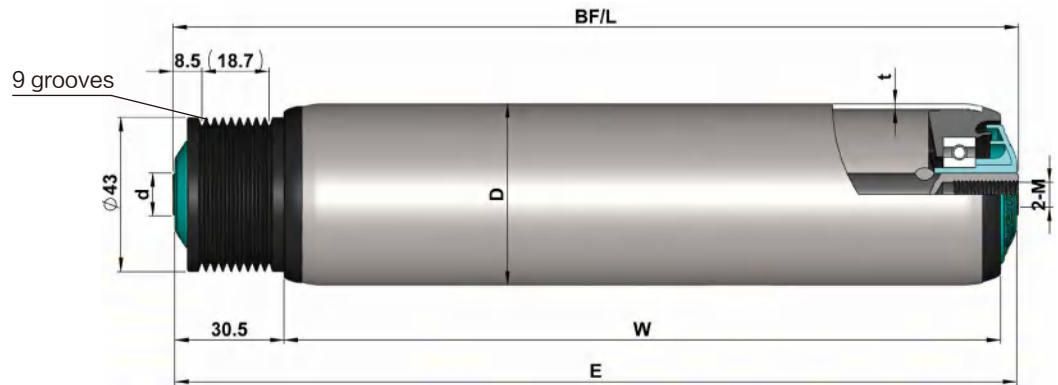

2250 Series Internal Thread

Tube Dia.(D)	Shaft Dia.(d)			
Φ50	Φ12/15	BF=W+36	E=W+35	L=W+36

Tube	D*T	Shaft Dia.(d)	
		Φ12 (M8x15)	Φ15 (M10x20)
Steel, zinc plated	Φ50x1.5	2.250.SHC.ACC	2.250.SHC.ADC
Steel, zinc plated with PVC sleeve (2mm)	Φ50x1.5	2.250.SHD.ACC	2.250.SHD.ADC
Stainless steel	Φ50x1.5	2.250.NHC.BCC	2.250.NHC.BDC
Aluminium	Φ50x1.5	○	○

○ — Available configuration

⚙ Φ50mm rollers can be fitted with PU sleeve (2mm).

⚠ Please choose the steel Poly-Vee roller when you must use 4PJ belt.