


3816/3826 Series Accumulating Conveyor Roller

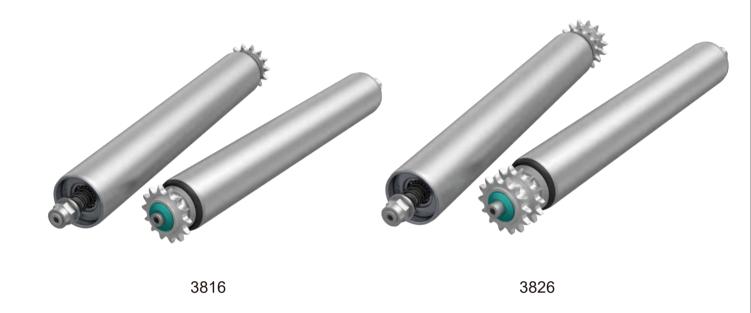

3816/3826 Series

Steel Single/Double Adjustable Accumulating Roller

Product Features

- The accumulation force can be adjusted with high flexibility by the nut at the end of the roller.
- The precision ball bearing is pressed tightly into the steel bearing housing for maximum durability.
- The friction housing is made of special material which greatly improves its abrasion resistance and lifespan.
- Temperature range: -5°C ~ +40°C.
- Humidity range: 30%~ 90% RH (non-condensation).
 Please contact us if humidity out of this scope.


Specifications

Bearing Unit	
Bearing housing	Polyamide/zinc plated
Precision ball bearing	6001/6002

Drive Element	
Sprocket	Steel

70




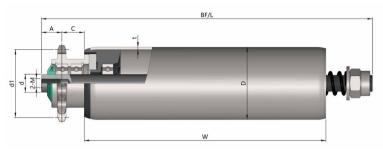

3816 Series Internal Thread

Tube Dia.(D)	Shaft Dia.(d)		Sprocket Type	Α	С	d1
Ф50	Ф12	BF/L=W+70	08B11T	17	18.5	Ф45.08
Ф60	Ф15	BF/L=W+70	08B14T	17	18.5	Ф57.07

Tube D*T		Shaft Dia.(d)		
Tube	וט	Ф12 (M8x15)	Ф15 (M8x15)	
Steel, zinc plated	Ф50x1.5	3.816.SHC.ACC		
Otcoi, zine plated	Ф60x2.0		3.816.SOC.ADC	
Stianless steel	Ф50x1.5	3.816.NHC.BCC		
Stiartiess steet	Ф60x2.0		3.816.NOC.BDC	

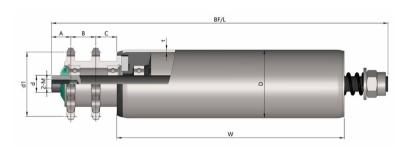

3826 Series Internal Thread

Tube Dia.(D)	Shaft Dia.(d)		Sprocket Type	Α	В	С	d1
Ф50	Ф12	BF/L=W+92	08B11T	17	22	18.5	Ф45.08
Ф60	Ф15	BF/L=W+92	08B14T	17	22	18.5	Ф57.07

Tube	D*T	Shaft Dia.(d)	
Tube	וטו	Ф12 (M8x15)	Ф15 (M8x15)
Steel, zinc plated	Ф50x1.5	3.826.SHC.ACC	
Steel, zinc plated	Ф60x2.0		3.826.SOC.ADC
Stianless steel	Ф50x1.5	3.826.NHC.BCC	
	Ф60x2.0		3.826.NOC.BDC

71



3816/3826 Series Accumulating Conveyor Roller

Duty Capacity Table of Accumulating Roller

Polymer Single/Double 3214/3224 Series Sprocket Accumulating Roller

▲ Duty capacity/ pc (No resistance from guardrail)

Roller material Conveying goods material	Steel tube	Rubber lagging
paper	3~20kg	2~15kg
plastic	5~25kg	2~20kg

Steel Single/Double 3211/3221 Series Sprocket Accumulating Roller

△ Duty capacity/ pc (No resistance from guardrail)

Roller material Conveying goods material	Steel tube	Rubber lagging
paper	3~15kg	2 4Flor
plastic	5~20kg	2~15kg

Steel Single/Double 3816/3826 Series Adjustable Accumulating Roller



△ Duty capacity/ pc (No resistance from guardrail)

Roller material Conveying goods material	Ф50x1.5	Ф60х2.0
plastic	0 551	0.701
wood	0~55kg	0~70kg
paper	0~40kg	

Please contact us if out of above range.

Note: All duty capacity mentioned is in the status of free of guardrail resistance or roller guardrail.

Please pay attention to the effective driving force when using the accumulating roller.

It is suggested to adopt the roller guardrail to minimize the frictional resistance between the conveyed object and the guardrail.

In case of special conveyed objects or absence of experience in using it, please test the prototype first.