



- 90W strong power
- forward and reverse rotating
stepless speed regulation
- linkage control up to three sets
- voltage option 220V/380V/400V



Specifications

Motorized Roller Expandable Conveyor (Driven by Poly-vee belt)

- Transport speed as 10–35m/min, Max weight as 60kgs/unit.



Model(Poly-vee belt)	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWDP-50	2	1120–2700	600 750 900	700~1000	60
FWDP-50	3	1540–3800			
FWDP-50	4	1960–4900			
FWDP-50	5	2380–6000			
FWDP-50	6	2800–7100			

*If you need the conveyor comply with CE standard, please contact us.

Motorized Roller Expandable Conveyor

08


Motorized Roller Expandable Conveyor (Driven by O-belt)

- Transport speed as 10–35m/min, Max weight as 50kgs/unit.




Model(O-belt)	Unit	Length mm	Width mm	Height mm	Load/Unit kg (no shock load)
FWDR-50	2	1120–2700	600 750 900	700~1000	50
FWDR-50	3	1540–3800			
FWDR-50	4	1960–4900			
FWDR-50	5	2380–6000			
FWDR-50	6	2800–7100			

Roller

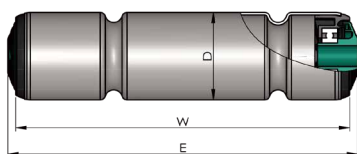

Double Grooved Conveyor Roller

Tube Dia.(D)	t	Shaft Dia.(d)	Tube Material	
			Zinc plated steel	SS304
Φ50	1.5	Φ12	√	○

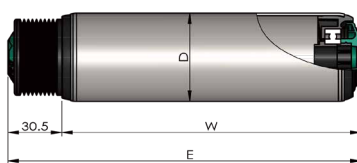

Poly-Vee Conveyor Roller

Tube Dia.(D)	t	Shaft Dia.(d)	Tube Material	
			Zinc plated steel	SS304
Φ50	1.5	Φ12	√	○

*PVC sleeve available for better surface friction.

Order Example

FWDP	—	S		50	—	G2	—	60	—	4	—	70
Model		Roller Material		OD of Roller		Optional Configuration		Width		Unit No.		Height
FWDP:Poly-Vee		Empty:Zinc Plated Steel				Empty :None		60: 600		2: 2 units		70: 700~1000
FWDR:O-belt		S:SS304				G2:Guide Wheels		75: 750		3: 3 units		
		P:PVC Sleeve						90: 900				

O——Available Configuration